


# POW-R-QUIK

**Part Number: 6-10-620**

| Hydraulic PTO Recirculation / Starter On-Off Valve Specification |  |
|--|--|
| Application  | HS, HSV, HSCV Starters   |
| Max Supply Pressure  | 3000 psi (207 bar)   |
| Rated Flow   | 60 GPM (227 LPM)   |
| Operating Temperatures   | -40° F to 180° F (-40°C to 82°C)   |
| Solenoid Characteristics   | 12 Vdc- 22 W (.03 HP) - 100% Duty Cycle - ISO/Din 43650 Form A 3 pin Connector |
| Valve Characteristics  | Normally Open - Manual Override  |
| Valve Installation Torque  | 150-160 ft-lbs (203-217 Nm)  |

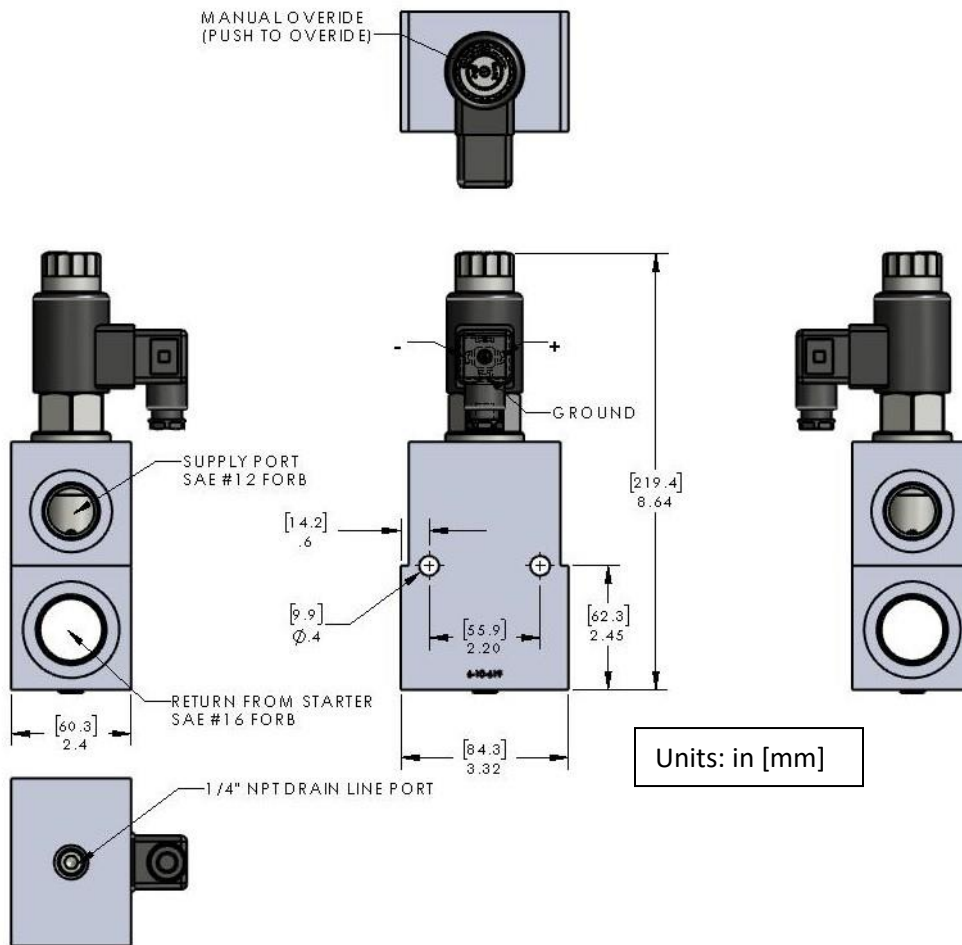

4540 West 160Th St, Cleveland, OH 44135  
 800.537.7444 / 216.404.7112  
 email: sales@powrquik.com