


**Part Number: 6-10-624**

Hydraulic PTO Recirculation / Starter On-Off Valve Specification	
Application	HS, HSV, HSCV Starters
Max Supply Pressure	3000 psi (207 bar)
Rated Flow	60 GPM (227 LPM)
Operating Temperatures	-40° F to 180° F (-40°C to 82°C)
Solenoid Characteristics	24 vdc - 22 w (.03 HP) - 100% Duty Cycle - ISO/Din 43650 Form A 3 pin Connector
Valve Characteristics	Normally Open - Manual Override
Valve Installation Torque	150-160 ft-lbs (203-217 Nm)

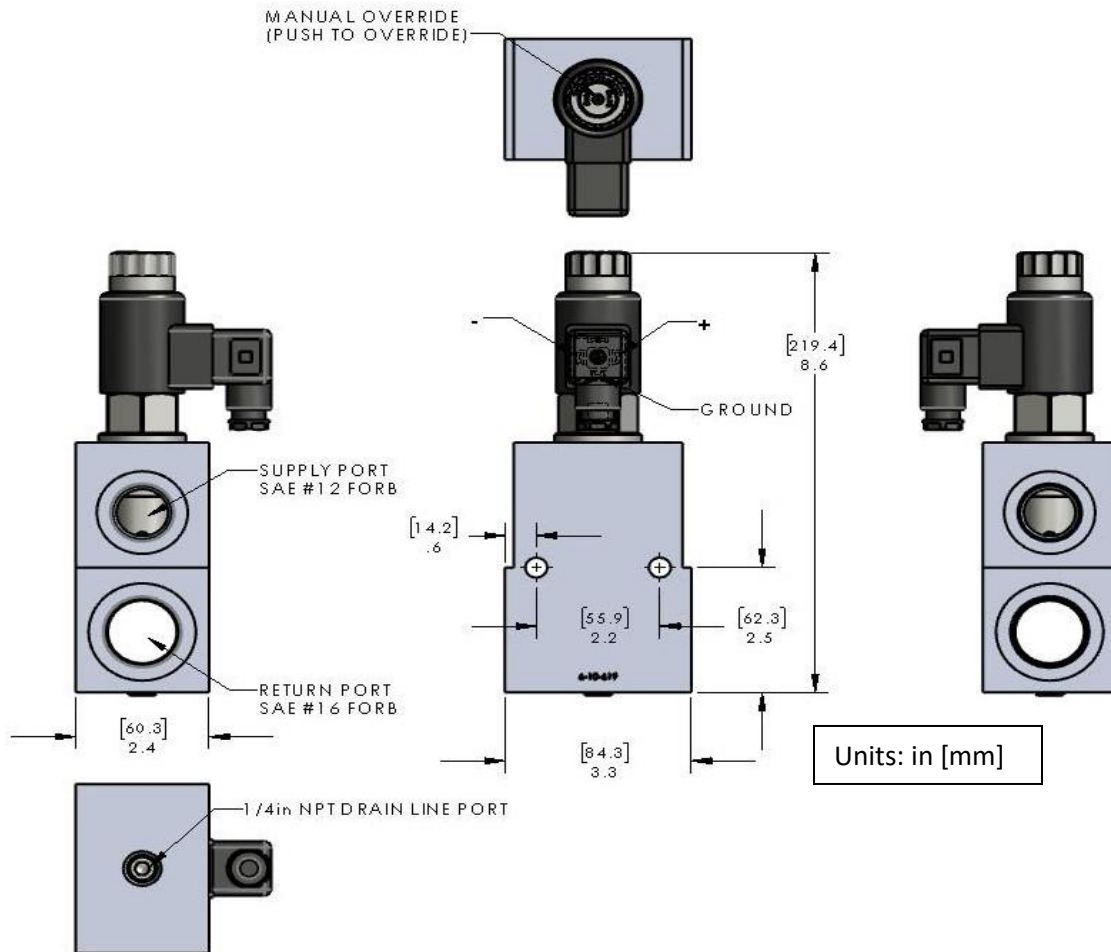

4540 West 160Th St, Cleveland,  
OH 44135

800.537.7444 / 216.404.7112

email: sales@powrquik.com