


**Part Number: 6-10-635**

Hydraulic PTO Recirculation / Starter On-Off Valve Specification	
Application	HS, HSV, HSCV Starters
Max Supply Pressure	3000 psi (207 bar)
Rated Flow	60 GPM (227 LPM)
Operating Temperatures	-40° F to 180° F (-40°C to 82°C)
Solenoid Characteristics	24 vdc - 23w - 100% Duty Cycle - ISO/Din 43650 Form A 3 pin Connector
Valve Characteristics	Normally Open - Manual Override
Valve Fitting Torques	SAE # 12: 88 - 96 ft-lbs (119 - 130 Nm) SAE # 16: 130 -143 ft-lbs (176 - 194 Nm)

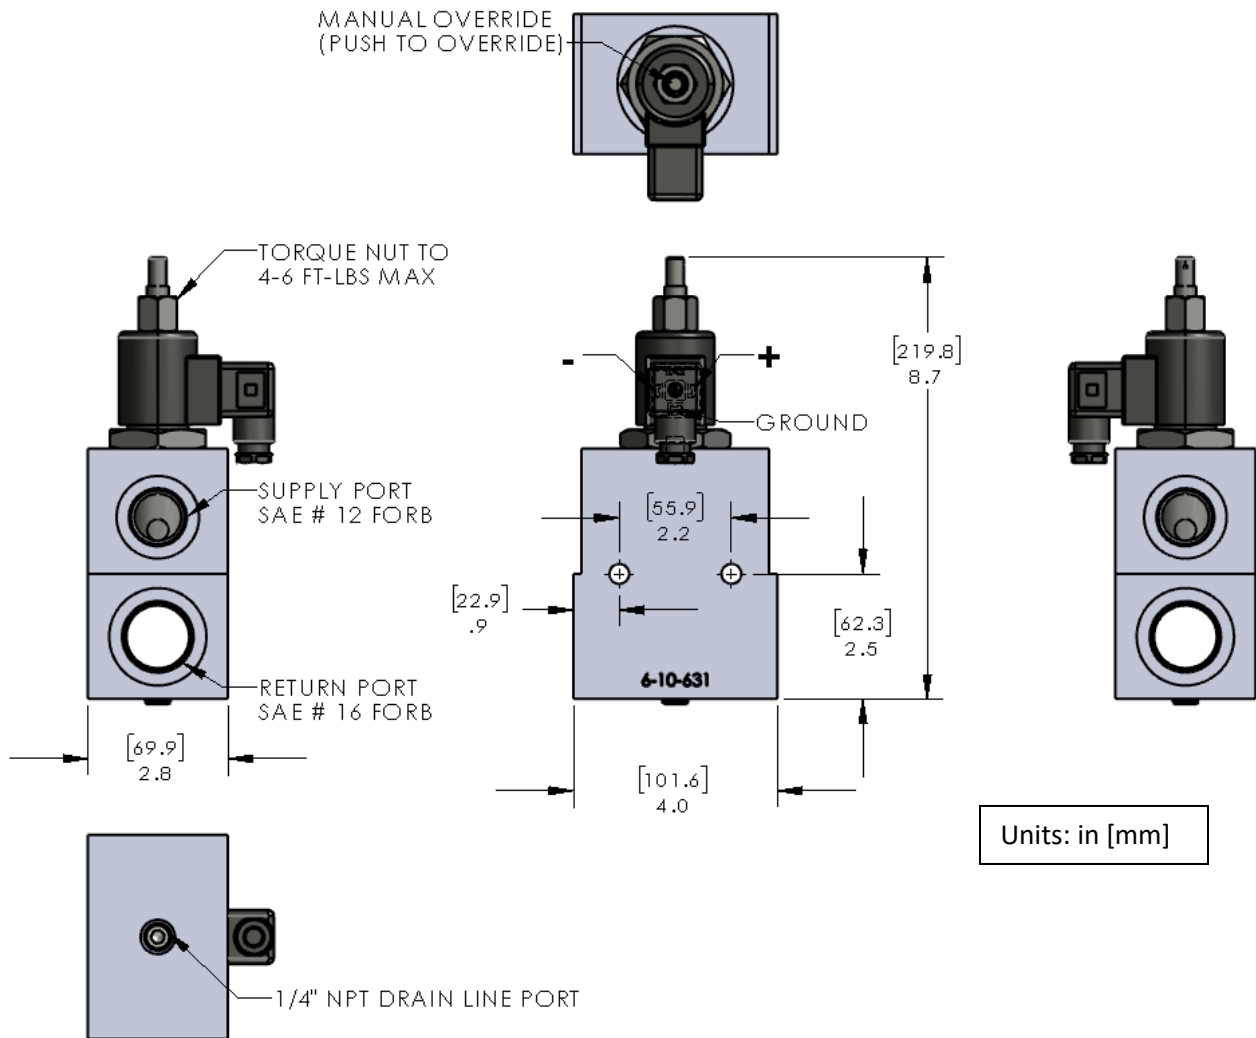

4540 West 160Th St, Cleveland,  
OH 44135  
800.537.7444 / 216.404.7112  
email: sales@powrquik.com